PERCEIVED BRIGHTNESS -140 LED ARRAY EXPONENTIAL BRIGHTNESS CONTROL CIRCUIT ö BRIGHTNESS CONTROL DEVICE

FIG. 1

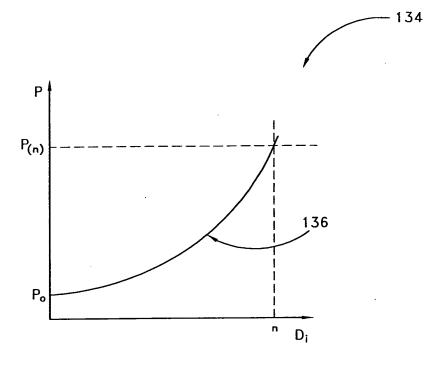


FIG. 2

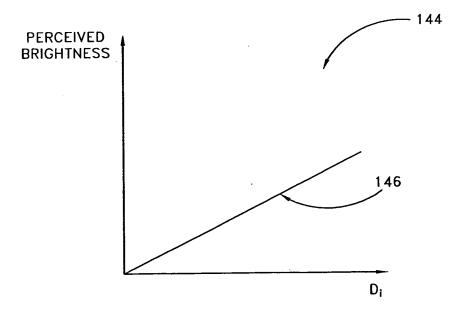


FIG. 3


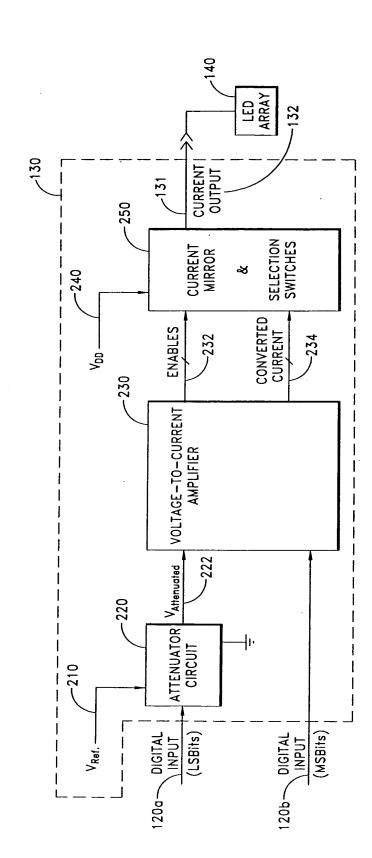



FIG. 4

roertoo.ozasoz

COCCACC CZISCI

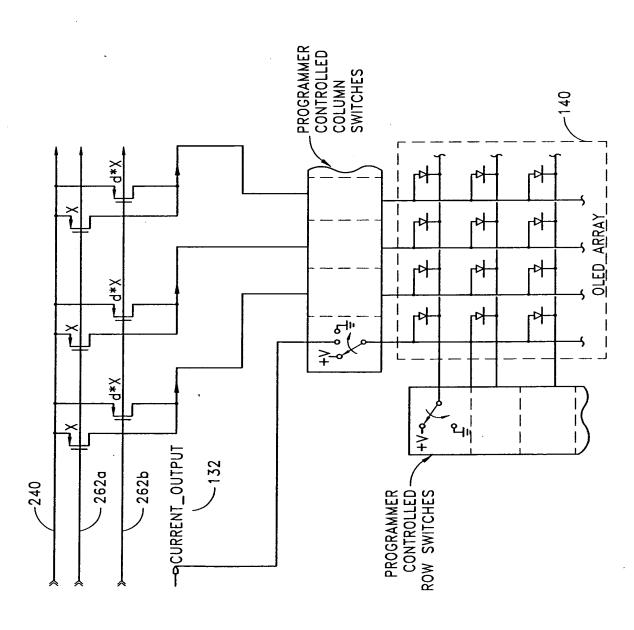

SCANNED, # 3

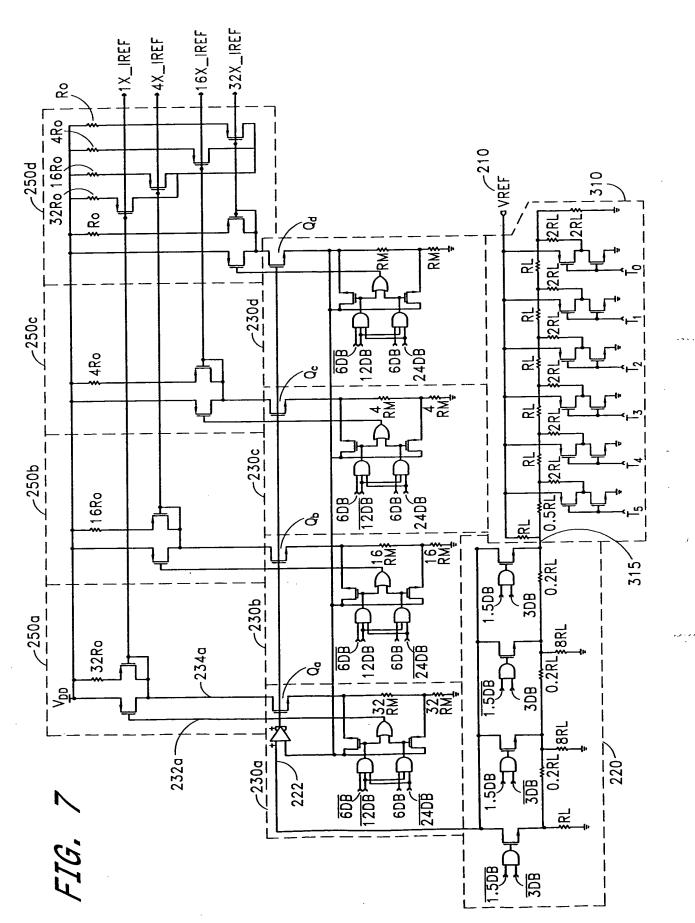

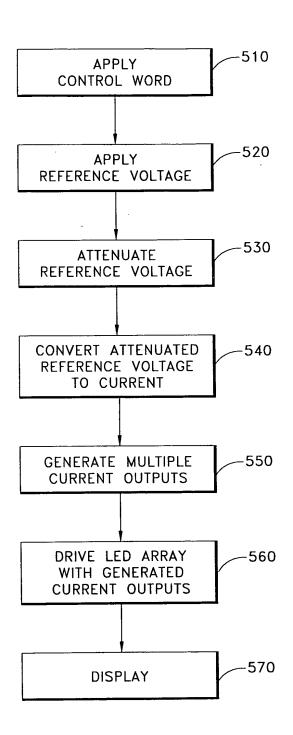


FIG. 8